


EASY PIPE REPAIR AND INSTALLATION COUPLING (MANUFACTURED BETWEEN DN50-DN4000mm)

MECHANICAL CLAMPING SLEEVE

(Easy pipe repair and installation clamping sleeves)

- 1-Rubber Gasket
- 2-Stainless Steel Body
- 3-Clutch Drive Plate
- 4-Rubber Gasket Conjunction Spot

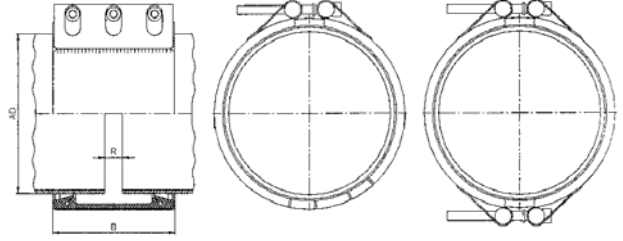

- AD= Pipe outer diameter
 B= Body Width
 C= Impermeability space
 R= Distance between two pipes (15-25 mm)

Flexible Type

With single piece body (above AD: 300 mm, 2-piece body recommended)

Repair Type

With 2- piece body (above AD: 160 mm, 2-piece body recommended)

They are used for easy and rapid repair and installation of all kinds of pipes (Steel, HDPE, CTP, GRP, DUCTILE FONT, etc.)

They provide flexible and full safe impermeability, used in pipe systems operating between light-vacuum and 25 bar pressure.

BODY: 304-316 or 316 L, 316 TI
 Hot dipped galvanized steel depending on wish

GASKET: EPDM (-20°C / +110°C) water, waste water, acid-basic
 NBR (-30°C / +90°C) gas-oil-fuel-organics

Diameter of Pipe	Installation Tolerance	Operation Pressure (PN)	Body Width (B)
50	±3	10-16-25	75-135
65	"	10-16-25	75-135
80	"	10-16-25	75-135
100	"	10-16-25	135-210
125	"	10-16-25	135-210
150	"	10-16-25	135-210
200	"	10-16-25	135-210
250	"	10-16-25	135-210
300	"	10-16-25	135-210
350	±5	10-16-25	135-210
400	"	6-10-16-25	135-210
450	"	6-10-16-25	135-210
500	"	6-10-16-25	135-210
550	"	6-10-16-25	135-210
600	"	6-10-16-25	135-210

Diameter of Pipe	Installation Tolerance	Operation Pressure (PN)	Body Width (B)
700	±5	6-10-16-25	135-210
800	"	6-10-16-25	135-210
900	"	6-10-16-25	135-210
1000	"	6-10-16	135-210
1200	"	6-10-16	135-210
1400	"	6-10-16	135-210
1500	"	6-10-16	135-210
1600	"	6-10	135-210
1800	"	6-10	135-210
2000	"	6-10	135-210
2200	"	6	135-210
2400	"	6	135-210
2600	"	4	135-210
2800	"	4	135-210
3000	"	4	135-210

www.bortek.com.tr

e-mail: info@bortek.com.tr

Bakir Pirinc San.Sit. Mustafa Kurtoglu cad.No:11 Erse is Mrk. K:4
 34524 Beylikduzu / İSTANBUL

Tel. : 0090 (0212) 875 99 22 Fax : 0090 (0212) 876 55 26
www.bortek.com.tr e-mail: info@bortek.com.tr